




from \varnothing 1,6m to 2,5m

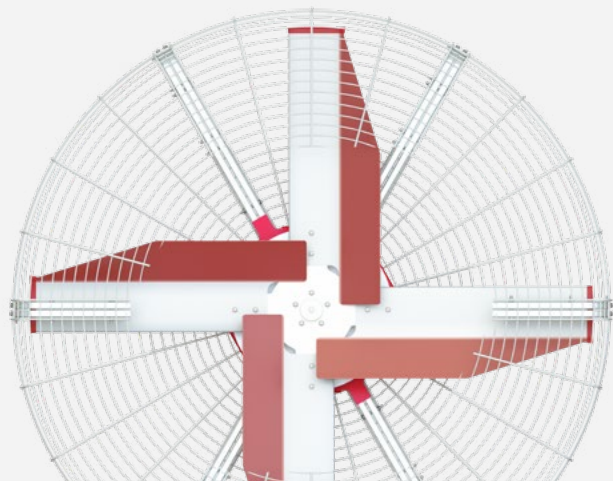

VSL VERTIGO are **axial fans with gear motor**, extraordinarily functional and cost convenient. **VSL VERTIGO** fans are the traditional alternative to the **VERTIGO** brushless engine and well suited for heavy-duty work situations. The steel mounting frame with position locking mechanism provides 90° rotation, allowing it to work horizontally or to be tilted as required from 0° to 90°: the aim is to optimize the airflow even in the most complex situations

STANDARD FEATURES

specific for dairy cows and beef sector




COMPACT GEARED MOTOR

Easy interchangeability is guaranteed by coaxial inline input and output shafts and identical mounting dimensions of the double and triple reduction design



ALLUMINIUM FOILS

Aluminium shape generates more airflow over the entire speed range. **Requires** less energy for optimum airflow. The blades create optimal spacing for maximum volume, velocity and air delivery to the space below.



VERSATILITY

The steel mounting frame with position locking mechanism provides 90° rotation.



CONTACT US AT SALES@CMP-IMPIANTI.COM FOR:

Reverse functionality
6 blades

Color customization
Install guides

Certifications
Warranties

Support & Services
Control Option

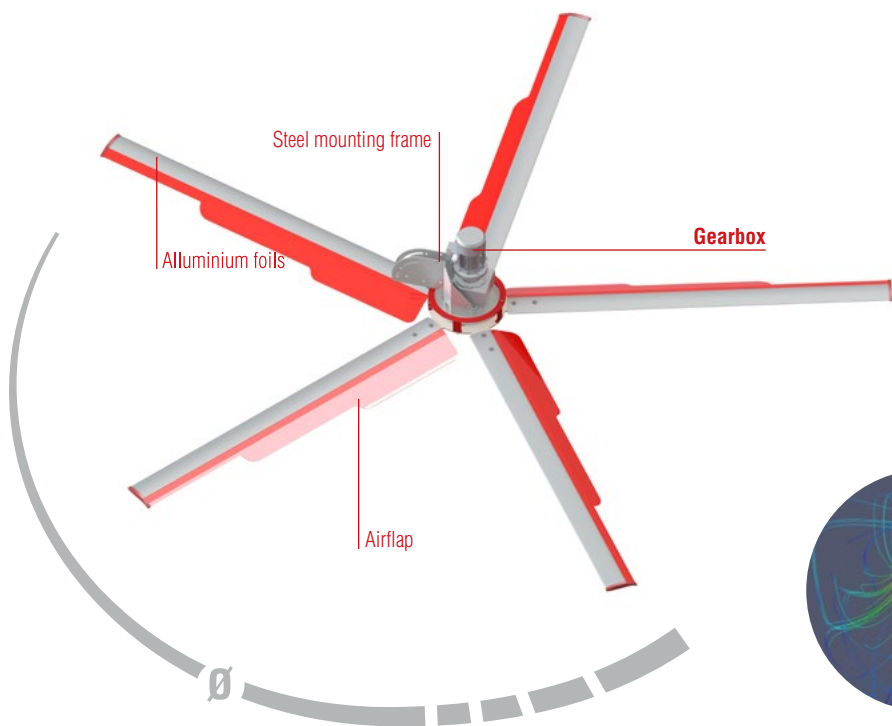

New airflow simulator contact us:
sales@cmp-impianti.com

Model	Diameter m	Rotation speed rpm	Blades	Fan Encumbrance (z) cm	Weight Kg	Voltage electrical supply	Power consumption KW	Safety Net
VSL VERTIGO	1,6	500	4	70	59	400 V 3 ph	1,2	120°
VSL VERTIGO	1,6	500	4	70	94	400 V 3 ph	1,2	360°
VSL VERTIGO	1,6	500	4	59	49	400 V 3 ph	1,2	No Net
VSL VERTIGO	2,5	240	6	55	55	400 V 3 ph	1,85	No Net

